
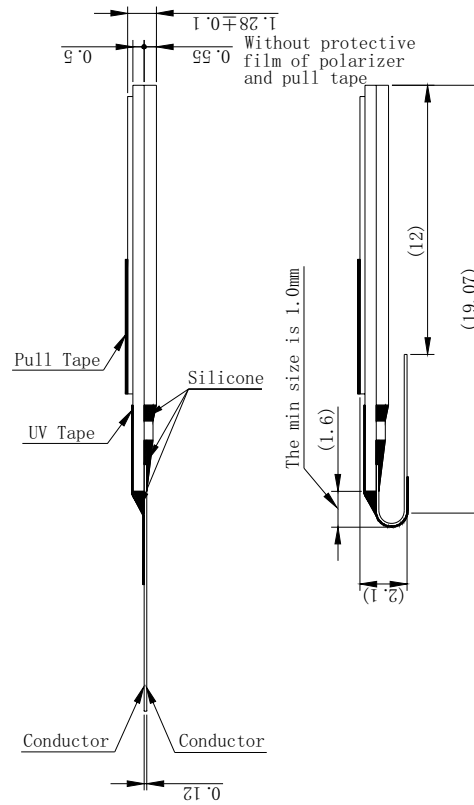
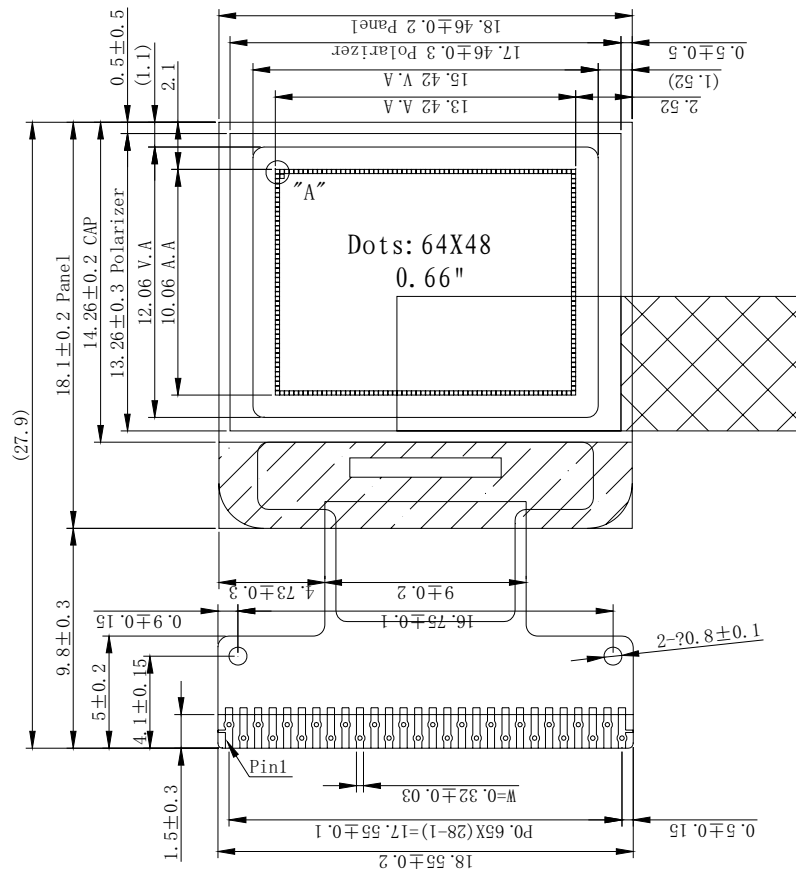


COM&SEG LAYOUT

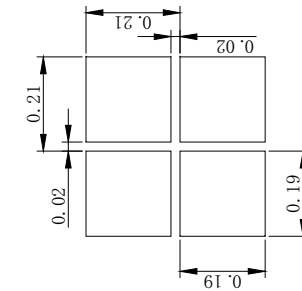

Detail A (20:1)

Pin Assignment	
NO.	SYMBOL
1	NC (GND)
2	C2P
3	C2N
4	C1P
5	C1N
6	VBAT
7	VSS
8	VDD
9	BS1
10	BS2
11	CS#
12	RES#
13	D/C#
14	R/W#
15	E/RD#
16	D0
17	D1
18	D2
19	D3
20	D4
21	D5
22	D6
23	D7
24	IREF
25	VCOMH
26	VCC
27	VLSS
28	NC (GND)

Specification

1. Display: OLED (White)
2. Format: 64*48
3. Driver IC: SSD1306Z
4. General Torlecrece: ± 0.3
5. Operate temp: $-40^{\circ}\text{C} \sim 70^{\circ}\text{C}$
Storage temp: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$
6. DUTY: 1/48
7. RoHS Compliant

CUSTOMER APVL		DATE	
DRAWN	SCALE	TITLE MI6448CO-W	
DFTG CHK	UNIT mm		
ENGR CHK		MODEL	
APPROVAL			
MULTI-INNO TECHNOLOGY CO.,LTD.		DWG NO	PAGE 1/1