

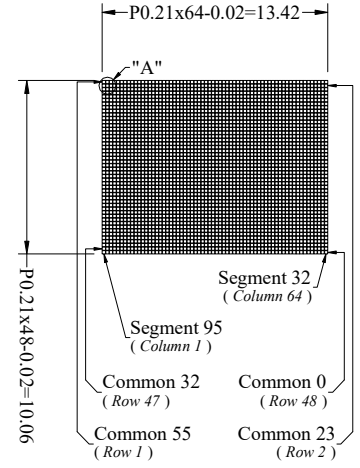
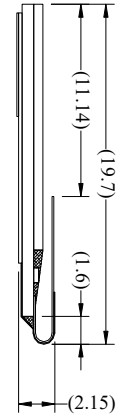
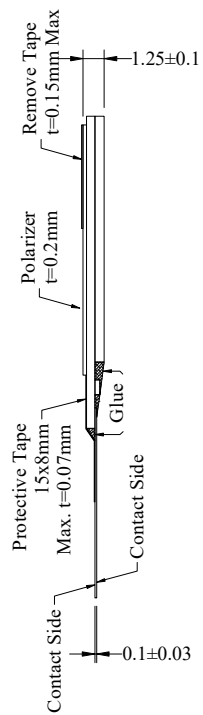


PIN	DESCRIPTION
1	N.C.(GND)
2	C2P
3	C2N
4	C1P
5	C1N
6	VBAT
7	VSS
8	VDD
9	BS1
10	BS2
11	CS#
12	RES#
13	D/C#
14	R/W#
15	E/RD#
16	D0
17	D1
18	D2
19	D3
20	D4
21	D5
22	D6
23	D7
24	IREF
25	VCOMH
26	VCC
27	VLSS
28	N.C.(GND)

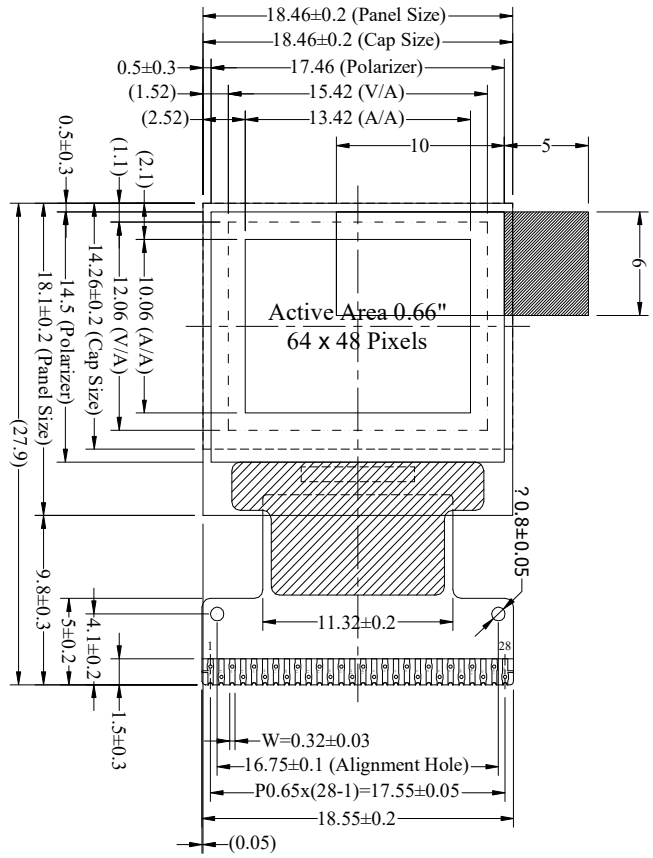

- NOTES:
- COLOR: WHITE
 - OPERATING VOLTAGE: VDD=2.8V (TYP.)
 - DRIVE DUTY: 1/48
 - DRIVER IC: SSD1306
 - OPERATING TEMP.: -40°C ~ 85°C
 - STORAGE TEMP.: -40°C ~ 85°C
 - INTERFACE: 8-BIT 68XX/80XX PARALLEL, 4-WIRE SPI, I²C
 - GENERAL TOLERANCE: ±0.3MM
 - ROHS COMPLIANT

MIT MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2020.04.18		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI6448CO-W2
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/1	OLED MODULE

01	FIRST ISSUE	CAROL	2020.04.18
VER.	REVISED DESCRIPTION	REVISOR	DATE