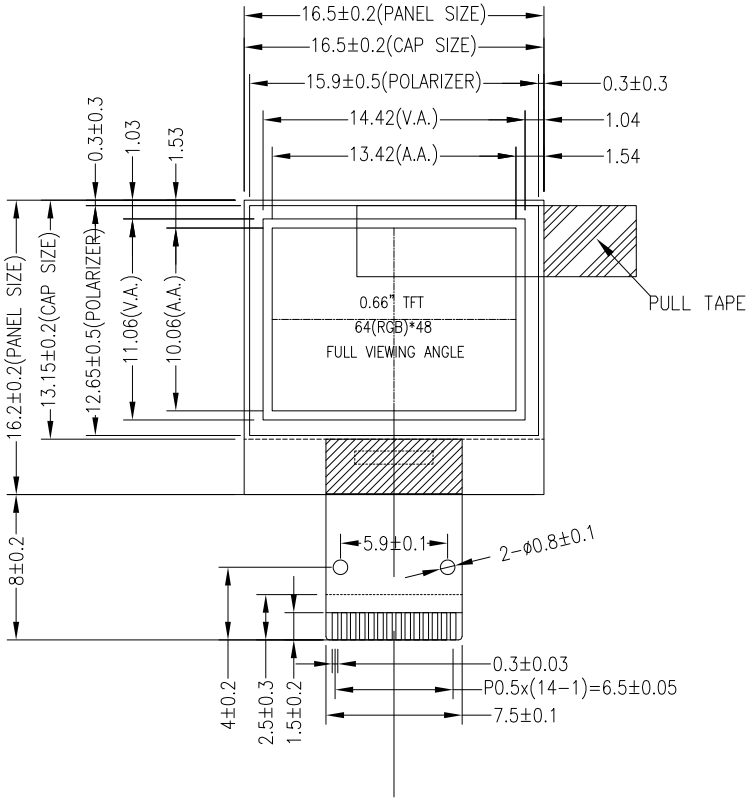

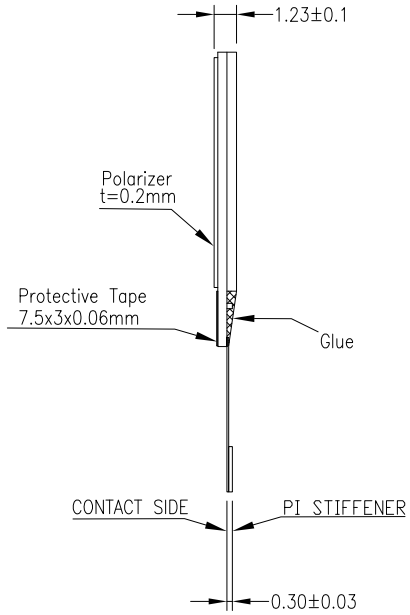

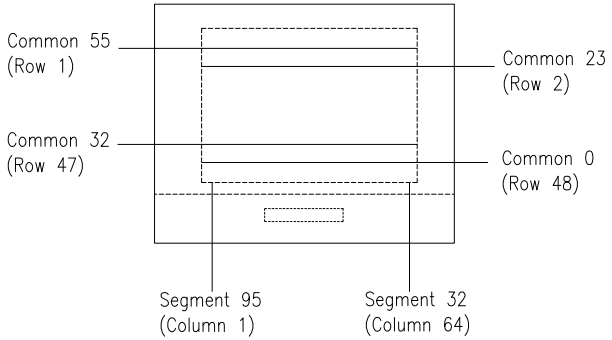

PIN ASSIGNMENT	
PIN	SYMBOL
1	C2P
2	C2N
3	C1P
4	C1N
5	VBAT
6	NV
7	VSS
8	VDD
9	RES#
10	SCL
11	SDA
12	IREF
13	VCOMH
14	VCC



NOTES:

1. COLOR: WHITE
2. OPERATING VOLTAGE: VDD=2.8V (TYP.)
3. DRIVE DUTY: 1/48
4. DRIVER IC: ST7315
5. OPERATING TEMP: −40°C ~ 70°C
6. STORAGE TEMP: −40°C ~ 85°C
7. INTERFACE: IIC
8. UNMARKED TOLERANCE: ±0.3MM
9. ROHS COMPLIANT

VER.	REVISED DESCRIPTION	REVISER	DATE
01	FIRST ISSUE	TUFFY	2025.07.10

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	TUFFY		MODULE P/N: MI6448G0-W1
CHECKED BY:		SCALE : 1/1	
APPROVED BY:		UNIT: mm	DESCRIPTION: OLED MODULE
VERSION NO:	01	SHEET NO: 1/1	