


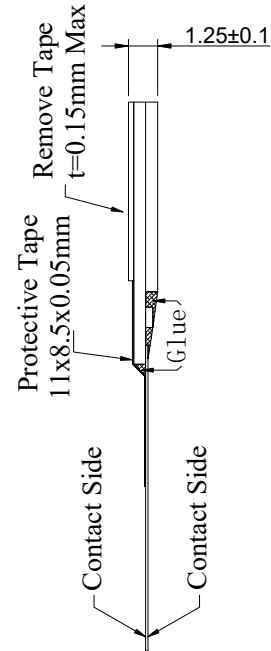


PIN DESCRIPTION	
PIN	SYMBOL
1	C2P
2	C2N
3	C1P
4	C1N
5	VBAT
6	VSS
7	VDD
8	BS1
9	CS
10	RES
11	D/C
12	D0
13	D1
14	D2
15	VCOMH
16	VCC

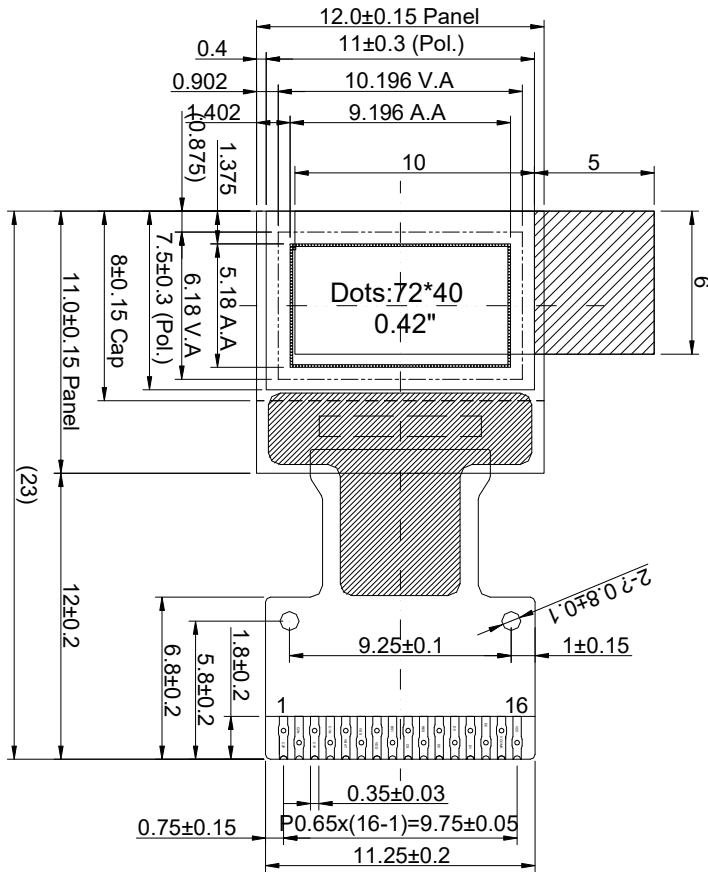

Scale 30:1

NOTES:

- COLOR: WHITE
- OPERATING VOLTAGE: VDD=2.8V (TYP.)
- DRIVE DUTY: 1/40
- DRIVER IC: SSD1315
- OPERATING TEMP.: -40°C ~ 85°C
- STORAGE TEMP.: -40°C ~ 85°C
- INTERFACE: 4-WIRE SPI, I²C
- GENERAL TOLERANCE: ± 0.3 MM
- ROHS COMPLIANT

		MULTI-INNO TECHNOLOGY CO., LTD.	
		DRAWN BY: CAROL 2022.02.21 CHECKED BY:	 SCALE: 1/1
VER. 01 REVISION: FIRST ISSUE	REVISOR: CAROL DATE: 2022.02.21	APPROVED BY:	DESCRIPTION: OLED MODULE
		SHEET NO.: 1/1	

01	FIRST ISSUE	CAROL	2022.02.21
VER.	REVISION DESCRIPTION	REVISOR	DATE