



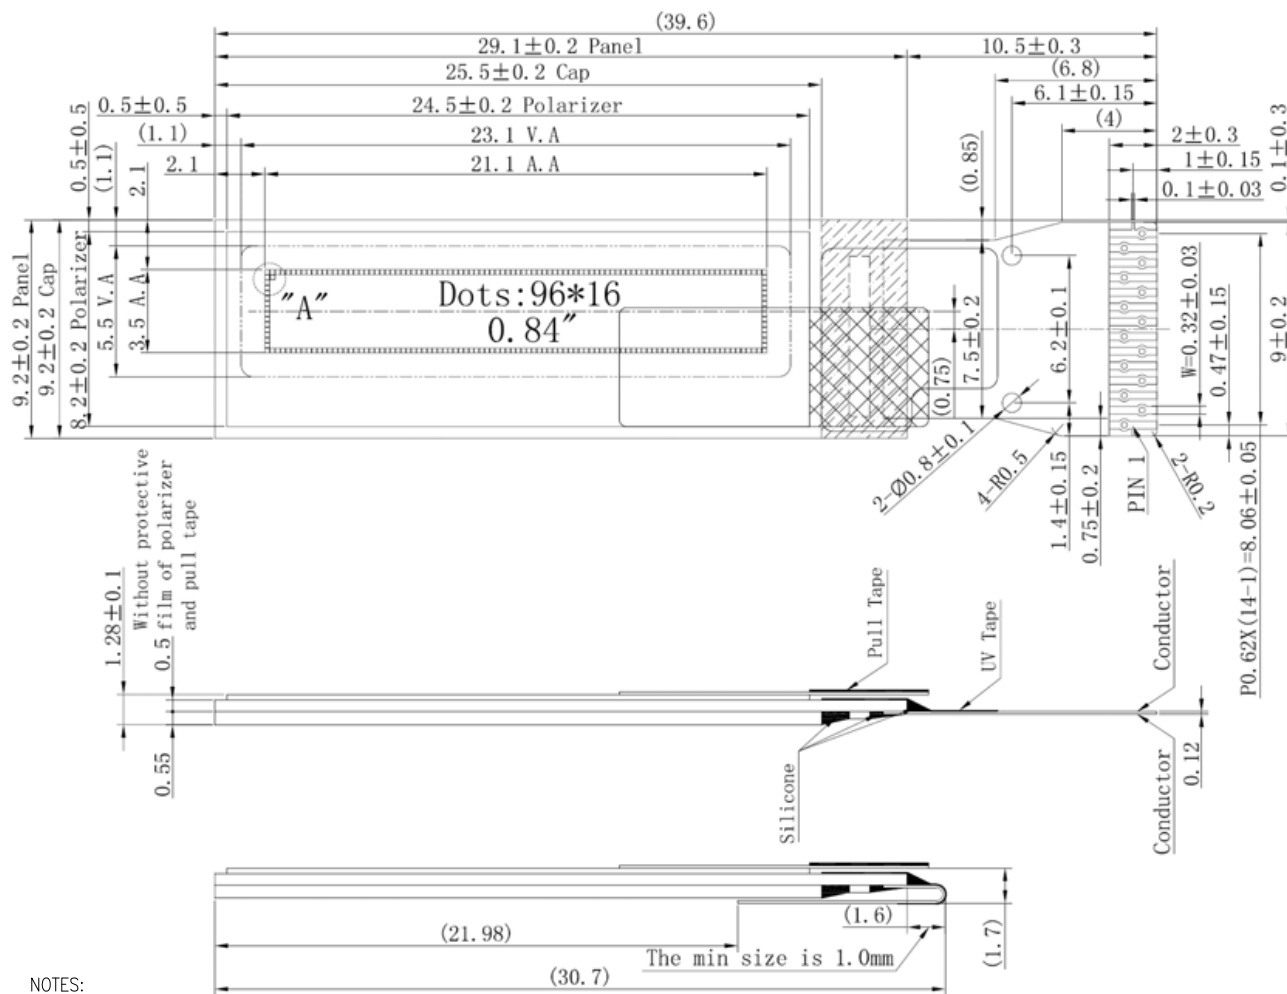


NOTES:

- COLOR: BLUE
- OPERATING VOLTAGE: VDD=2.8V (TYP.)
- DRIVE DUTY: 1/16
- DRIVER IC: SSD1306BZ
- OPERATING TEMP.: -40°C ~ 70°C
- STORAGE TEMP.: -40°C ~ 85°C
- INTERFACE: IIC
- GENERAL TOLERANCE: ±0.3MM
- ROHS COMPLIANT

PIN ASSIGNMENT	
PIN	SYMBOL
1	C2P
2	C2N
3	C1P
4	C1N
5	VBAT
6	VBREF (NC)
7	VSS
8	VDD
9	RES#
10	SCL
11	SDA
12	IREF
13	VCOMH
14	VCC

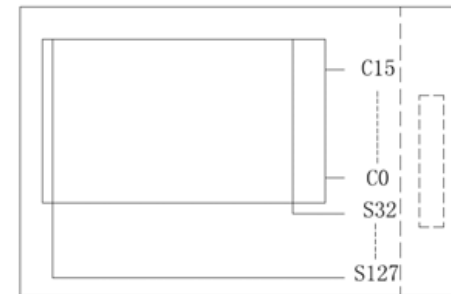

Com & Seg layout

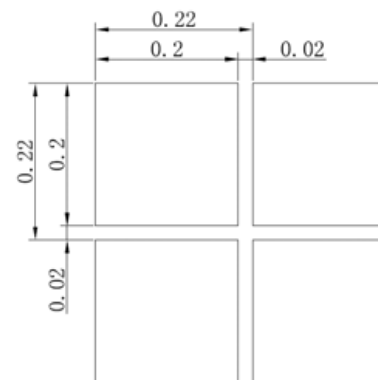

Detail A (30:1)

01	FIRST ISSUE	RITA	2024.03.01	APPROVED BY:	SCALE : 1/1	MODULE P/N:
VER.	REVISED DESCRIPTION	REVISOR	DATE	VERSION NO:	UNIT: mm	DESCRIPTION:
				01	SHEET NO.: 1/1	OLED MODULE



MULTI-INNO TECHNOLOGY CO., LTD.