
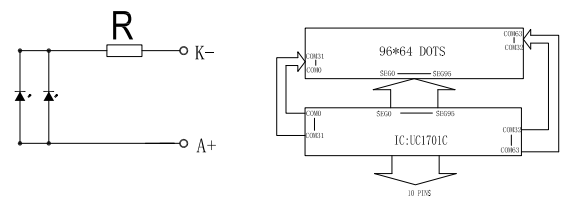


↑ 6 O'CLOCK VIEWING DIRECTION

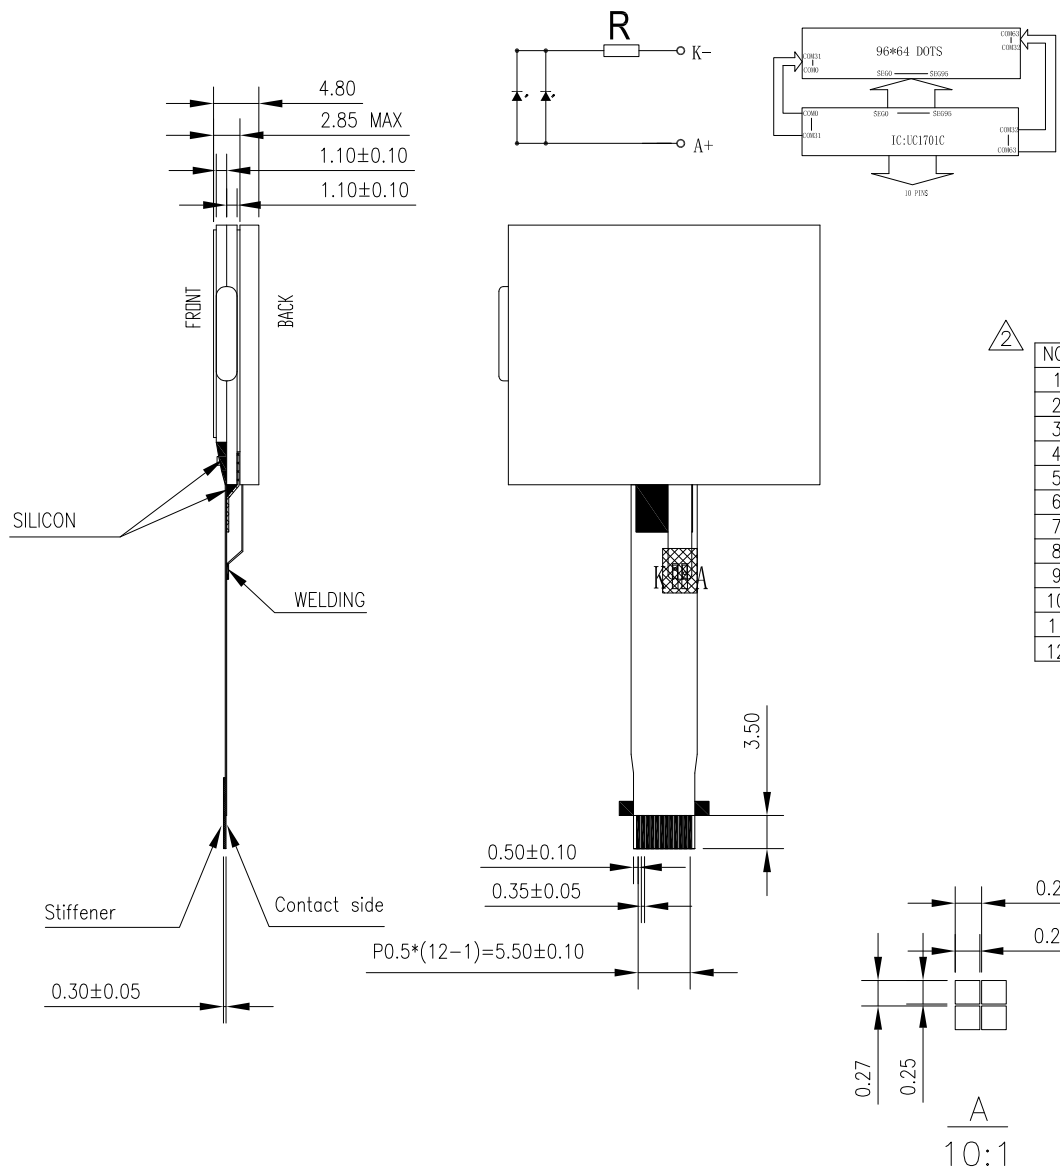

NO.	SYMBOL
1	A
2	K
3	VG
4	XVO
5	V0
6	VSS
7	VDD
8	D7
9	D6
10	CD
11	RST
12	CS0

- NOTES:
1. DISPLAY TYPE: FSTN, POSITIVE, TRANSMISSIVE.
 2. DRIVE METHOD: 1/65DUTY, 1/9BIAS, VDD=3.3V, VOP=9.0V.
 3. VIEWING DIRECTION: 6:00 O'CLOCK.
 4. IC DRIVER: UC1701C, INTERFACE: SPI.
 5. OPERATING TEMP.: -10°~60°.
 6. STORAGE TEMP.: -10°~60°.
 7. BACKLIGHT TYPE.: 2-CHIP WHITE LED, VF=3.3V, IF=30mA.
 8. GENERAL TOLERANCE: ±0.3mm.
 9. ROHS COMPLIANT.

Mit MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	RITA	20180510	SCALE : 1/1	MODULE P/N:
CHECKED BY:			UNIT: mm	M19664F-G-1
APPROVED BY:			DESCRIPTION:	GRAPHIC MODULE
VERSION NO:	02			

VER.	REVISED DESCRIPTION	REVISER	DATE
02	ADD THE PIN DEFINITION	RITA	2018.05.15
01	FIRST ISSUE	RITA	2018.05.10