


TFT模塊
STANDARD TFT MODULES

※ TFT size from 0.96" to 15.0" for your selection.

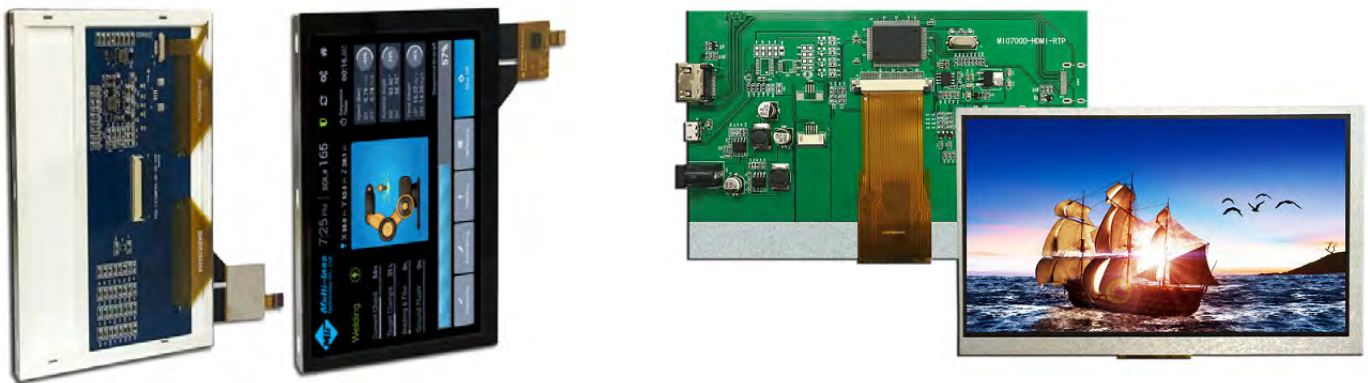

MIT P/N	Size Inch	Resolution	A.A. (mm)	Outline Size (mm)	Brightness (nits)	Top. (°C)	Tstor. (°C)	Interface	Viewing Direction	Touch	Remarks
MI0096AT-1	0.96	128xRGBx64	21.74x10.86	26.70x19.26x1.60	240	-20-70	-30-80	8-bit CPU, SPI	6:00	No	
MI0096C1T-2	0.96	80xRGBx160	10.80x21.70	13.50x27.90x1.50	400	-20-70	-30-80	4-wire SPI	Free	No	IPS mode
MI0096C1T-4	0.96	80xRGBx160	10.80x21.70	14.04x27.95x2.05	400	-20-70	-30-80	4-wire SPI	Free	No	IPS mode
MI0114AT-1	1.14	135xRGBx240	14.86x24.91	17.60x31.00x1.60	400	-20-70	-30-80	4-wire SPI	Free	No	IPS mode, FPC connector
MI0114AT-2	1.14	135xRGBx240	14.86x24.91	17.60x31.00x1.60	400	-20-70	-30-80	4-wire SPI	Free	No	IPS mode, FPC soldering
MI0128BT-2	1.28	240xRGBx240	32.40x32.40	35.90x39.70x1.50	450	-20-70	-30-80	CPU, SPI, SPI+RGB	Free	No	IPS mode, circular TFT
MI0130ET-3	1.30	240xRGBx240	23.40x23.40	26.16x29.22x1.45	350	-20-70	-30-80	4-wire SPI	Free	No	IPS mode
MI0130ET-7	1.30	240xRGBx240	23.40x23.40	26.16x29.13x1.73	440	-20-70	-30-80	4-wire 8-bit SPI	Free	No	IPS mode
MI0130E2T-1	1.30	240xRGBx240	23.40x23.40	26.16x29.22x1.50	350	-20-70	-30-80	8-bit CPU, 4-wire SPI	Free	No	IPS mode
MI0130DT-1	1.30	320xRGBx320	33.12x33.12	36.07x39.16x1.46	350	-20-70	-30-80	1-lane MIPI	Free	No	Circular TFT
MI0130FT-1	1.30	360xRGBx360	32.94x32.94	35.14x37.57x1.39	350	-20-70	-30-80	4-wire SPI	Free	No	Circular TFT
MI0145B1T-2A	1.45	128xRGBx128	25.50x26.50	32.36x38.00x2.60	240	-20-70	-30-80	3-/4-wire SPI	6:00	No	
MI0145B1T-2ARP	1.45	128xRGBx128	25.50x26.50	32.36x38.00x3.80	190	-20-70	-30-80	3-/4-wire SPI	6:00	RTP	
MI0145B1T-3	1.45	128xRGBx128	25.50x26.50	32.36x38.00x2.60	240	-20-70	-30-80	8-bit CPU, 3-/4-wire SPI	6:00	No	
MI0145B1T-3RP	1.45	128xRGBx128	25.50x26.50	32.36x38.00x3.80	190	-20-70	-30-80	8-bit CPU, 3-/4-wire SPI	6:00	RTP	
MI0145FT-2A	1.45	128xRGBx128	25.50x26.50	32.36x38.00x2.60	350	-20-70	-30-80	3-/4-wire SPI	Free	No	IPS mode
MI0145DT-2	1.45	240xRGBx320	22.10x29.47	25.90x35.97x1.55	300	-20-70	-30-80	8-bit CPU, 4-wire SPI	12:00	No	
MI0154BT-2	1.54	240xRGBx240	27.72x27.72	31.52x33.72x1.90	400	-20-70	-30-80	8-bit CPU	Free	No	IPS mode
MI0154BT-3	1.54	240xRGBx240	27.72x27.72	31.52x33.95x1.75	350	-20-70	-30-80	4-wire SPI	Free	No	IPS mode
MI0154BT-11	1.54	240xRGBx240	27.72x27.72	31.52x33.95x1.75	600	-20-70	-30-80	4-wire SPI+18-bit RGB	Free	No	IPS mode
MI0154CT-1	1.54	320xRGBx320	27.72x27.72	31.52x33.95x1.75	580	-20-70	-30-80	4-wire SPI+18-bit RGB	Free	No	IPS mode
MI0177LT-3	1.77	128xRGBx160	28.03x35.04	34.70x46.70x2.50	320	-20-70	-30-80	8-bit CPU	6:00	No	
MI0177LT-4	1.77	128xRGBx160	28.03x35.04	34.70x46.70x2.50	320	-20-70	-30-80	3-/4-wire SPI	6:00	No	
MI0177LT-4RP	1.77	128xRGBx160	28.03x35.04	34.70x46.70x3.70	260	-20-70	-30-80	3-/4-wire SPI	6:00	RTP	
MI0200ADT-1	2.00	176xRGBx220	31.68x39.60	37.68x51.30x2.23	300	-20-70	-30-80	8-bit CPU	6:00	No	
MI0200AET-1	2.00	240xRGBx320	30.60x40.80	37.88x51.50x2.50	230	-20-70	-30-80	4-wire SPI	Free	No	IPS mode
MI0200WT-2	2.00	240xRGBx320	30.60x40.80	37.88x51.50x2.50	230	-20-70	-30-80	8-bit CPU	6:00	No	
MI0200ZT-2	2.00	240xRGBx320	30.60x40.80	35.70x51.20x2.20	400	-20-70	-30-80	4-wire SPI	Free	No	IPS mode
MI0200ZT-3	2.00	240xRGBx320	30.60x40.80	34.60x47.80x2.05	400	-20-70	-30-80	8-bit CPU, 4-wire SPI	Free	No	IPS mode
MI0210BT-1	2.10	480xRGBx480	53.28x53.28	56.18x59.71x2.30	300	-20-70	-30-80	3-wire SPI+24-bit RGB	Free	No	IPS
MI0213AT-2	2.13	122x250	23.67x48.50	27.068x56.20x1.05	-	-20-70	-30-80	4-wire SPI	Free	No	Reflective, Mono TFT
MI0213BT-1	2.13	240x320	32.40x43.20	35.40x38.60x0.91	-	-20-70	-30-80	6-bit RGB	Free	No	Reflective with slight transmissive
MI0220AAT-3	2.20	240xRGBx320	33.84x45.12	41.04x56.45x2.85	200	-20-70	-30-80	CPU, RGB, SPI	6:00	No	
MI0230FT-1	2.30	320xRGBx240	46.75x35.06	51.00x45.80x2.30	550	-20-70	-30-80	4-wire SPI	6:00	No	

TFT模塊
STANDARD TFT MODULES

MIT P/N	Size Inch	Resolution	A.A. (mm)	Outline Size (mm)	Brightness (nits)	Top. (°C)	Tstor. (°C)	Interface	Viewing Direction	Touch	Remarks
MI0236AT-1	2.36	480xRGBx234	48.00x35.68	55.20x47.55x2.90	260	-20-70	-30-80	8-bit RGB	6:00	No	
MI0240A3T	2.40	240xRGBx320	36.72x48.96	42.72x60.26x2.90	184	-20-70	-30-80	CPU, RGB, SPI	6:00	RTP	
MI0240A3T-1	2.40	240xRGBx320	36.72x48.96	42.72x60.26x1.90	230	-20-70	-30-80	CPU, RGB, SPI	6:00	No	
MI0240A4T-1	2.40	240xRGBx320	36.72x48.96	42.72x60.26x2.46	460	-20-70	-30-80	8-/16-bit CPU	6:00	No	
MI0240A4T-1RP	2.40	240xRGBx320	36.72x48.96	42.72x60.26x3.71	370	-20-70	-30-80	8-/16-bit CPU	6:00	RTP	
MI0240AFT-2	2.40	240xRGBx320	36.72x48.96	42.72x60.40x2.20	600	-20-70	-30-80	8-/9-/16-/18-bit CPU	Free	No	IPS mode
MI0260ET-1	2.60	240xRGBx320	39.60x52.80	46.00x64.00x3.10	350	-20-70	-30-80	CPU, RGB, SPI	Free	No	IPS mode
MI0260ET-1RP	2.60	240xRGBx320	39.60x52.80	46.00x64.00x4.30	280	-20-70	-30-80	CPU, RGB, SPI	Free	RTP	IPS mode
MI0270DT-1	2.70	400xRGBx240	58.80x35.28	62.80x42.82x1.64	-	-20-70	-30-80	3-wire SPI	12:00	No	Reflective with slight transmissive
MI0283AAT-4CP2	2.83	240xRGBx320	43.20x57.60	50.50x69.70x4.30	425	-20-70	-30-80	SPI, SPI+RGB	Free	CTP	IPS mode
MI0283Q1T-22CP2	2.83	240xRGBx320	43.20x57.60	50.20x69.30x4.60	250	-20-70	-30-80	CPU, RGB, SPI	6:00	CTP	
MI0283Q3T-9A-1	2.83	240xRGBx320	43.20x57.60	50.20x69.30x2.90	300	-20-70	-30-80	CPU, SPI, SPI+RGB	6:00	No	
MI0283Q3T-13	2.83	240xRGBx320	43.20x57.60	50.20x69.30x2.90	300	-20-70	-30-80	CPU, SPI, SPI+RGB	6:00	No	
MI0283Q3T-13RP	2.83	240xRGBx320	43.20x57.60	50.20x69.30x4.00	240	-20-70	-30-80	CPU, SPI, SPI+RGB	6:00	RTP	
MI0283Q3T-13CP	2.83	240xRGBx320	43.20x57.60	50.20x69.30x4.60	255	-20-70	-30-80	CPU, SPI, SPI+RGB	6:00	CTP	
MI0283Q3T-17	2.83	240xRGBx320	43.20x57.60	50.20x69.30x2.90	650	-20-70	-30-80	CPU, SPI, SPI+RGB	6:00	No	
MI0283Q3T-22	2.83	240xRGBx320	43.20x57.60	50.20x69.30x2.90	300	-20-70	-30-80	CPU, SPI, SPI+RGB	6:00	No	
MI0283Q3T-22CP2	2.83	240xRGBx320	43.20x57.60	50.20x69.30x4.60	255	-20-70	-30-80	CPU, SPI, SPI+RGB	6:00	CTP	
MI0283AHT-2	2.83	480xRGBx640	43.20x57.60	45.90x64.90x1.50	200	-20-70	-30-80	2-lane MIPI	Free	No	IPS mode
MI0295AT-1	2.95	360xRGBx640	36.72x65.28	41.04x73.67x2.17	340	-20-70	-30-80	2-lane MIPI	Free	No	IPS mode
MI0297AT-1	2.97	254xRGBx800	22.86x72.00	25.20x79.45x1.59	240	-20-70	-30-80	3-wire SPI+18-bit RGB	Free	No	IPS mode
MI0320YT-1	3.20	240xRGBx320	48.60x64.80	55.94x77.60x2.40	360	-20-70	-30-80	8-/16-bit CPU	6:00	No	
MI0320YT-1RP	3.20	240xRGBx320	48.60x64.80	55.94x77.60x3.55	290	-20-70	-30-80	8-/16-bit CPU	6:00	RTP	
MI0320ZT-1	3.20	240xRGBx320	48.60x64.80	55.94x77.60x2.40	360	-20-70	-30-80	8-/16-bit Parallel CPU	Free	No	IPS mode
MI0320VIT-1	3.20	240xRGBx400	41.76x69.60	48.40x81.50x2.77	400	-20-70	-30-80	18-bit CPU, SPI+bit RGB	6:00	No	
MI0340AT-1	3.40	800xRGBx800	87.60x87.60	96.60x99.00x2.45	380	-20-70	-30-80	3-lane MIPI	Free	No	Circular TFT
MI0340AT-1CP	3.40	800xRGBx800	87.60x87.60	96.60x99.00x3.98	350	-20-70	-30-80	3-lane MIPI	Free	CTP	Circular TFT
MI0347CT-2	3.47	320xRGBx480	48.96x73.44	54.34x84.07x1.93	320	-20-70	-30-80	SPI+24-bit RGB	6:00	No	
MI0350ADT-4	3.50	320xRGBx240	70.08x52.56	76.90x63.90x4.30	350	-20-70	-30-80	CPU, RGB, SPI	12:00	RTP	
MI0350ADT-5	3.50	320xRGBx240	70.08x52.56	76.90x63.90x3.10	450	-20-70	-30-80	CPU, RGB, SPI	12:00	No	
MI0350ADT-5CP3	3.50	320xRGBx240	70.08x52.56	76.90x63.90x5.00	380	-20-70	-30-80	CPU, RGB, SPI	12:00	CTP	
MI0350AGT	3.50	320xRGBx240	70.08x52.56	76.90x63.90x4.35	240	-20-70	-30-80	RGB/CCIR/YUV	12:00	RTP	
MI0350AGT-1	3.50	320xRGBx240	70.08x52.56	76.90x63.90x3.20	300	-20-70	-30-80	RGB/CCIR/YUV	12:00	No	
MI0350AGT-1CP2	3.50	320xRGBx240	70.08x52.56	76.90x63.90x5.10	255	-20-70	-30-80	RGB/CCIR/YUV	12:00	CTP	
MI0350C1T-14	3.50	320xRGBx240	70.08x52.56	76.90x63.90x4.30	400	-20-70	-30-80	RGB/CCIR/YUV	12:00	RTP	
MI0350C1T-16	3.50	320xRGBx240	70.08x52.56	76.90x63.90x3.15	500	-20-70	-30-80	RGB/CCIR/YUV	12:00	No	
MI0350C1T-16CP	3.50	320xRGBx240	70.08x52.56	76.90x63.90x5.00	420	-20-70	-30-80	RGB/CCIR/YUV	12:00	CTP	
MI0350C4T	3.50	320xRGBx240	70.08x52.56	76.90x63.90x4.25	240	-20-70	-30-80	RGB/CCIR/YUV	12:00	RTP	
MI0350C4T-1	3.50	320xRGBx240	70.08x52.56	76.90x63.90x3.15	300	-20-70	-30-80	RGB/CCIR/YUV	12:00	No	
MI0350C4T-1CP	3.50	320xRGBx240	70.08x52.56	76.90x63.90x5.10	250	-20-70	-30-80	RGB/CCIR/YUV	12:00	CTP	
MI0350AKT-4	3.50	320xRGBx480	48.96x73.44	54.66x82.94x2.20	350	-20-70	-30-80	CPU, RGB, SPI	Free	No	IPS mode
MI0350AKT-11RP	3.50	320xRGBx480	48.96x73.44	54.66x82.94x3.40	560	-20-70	-30-80	SPI, SPI+RGB	Free	RTP	IPS mode
MI0350ART-1	3.50	320xRGBx480	48.96x73.44	54.66x82.94x2.20	360	-20-70	-30-80	SPI, SPI+RGB	6:00	No	
MI0350ART-1RP	3.50	320xRGBx480	48.96x73.44	54.66x82.94x3.45	290	-20-70	-30-80	SPI, SPI+RGB	6:00	RTP	
MI0350EAT-6	3.50	320xRGBx480	48.96x73.44	54.66x82.90x3.45	290	-20-70	-30-80	CPU, RGB, SPI	6:00	RTP	
MI0350EAT-7	3.50	320xRGBx480	48.96x73.44	54.66x82.90x2.30	400	-20-70	-30-80	CPU, RGB, SPI	6:00	No	
MI0350BNT-1	3.50	480xRGBx272	77.76x43.52	86.80x56.50x2.75	350	-20-70	-30-80	24-bit RGB	6:00	No	
MI0350ACT-5	3.50	480xRGBx640	53.28x71.04	64.00x85.00x3.00	525	-20-60	-30-70	SPI+18-bit RGB	9:00	No	
MI0350ACT-5RP	3.50	480xRGBx640	53.28x71.04	64.00x85.00x4.20	420	-20-60	-30-70	SPI+18-bit RGB	9:00	RTP	
MI0350BDT-1	3.50	480xRGBx800	45.36x75.60	52.96x87.20x3.00	350	-20-70	-30-80	SPI+18-bit RGB	Free	No	
MI0350BDT-1RP	3.50	480xRGBx800	45.36x75.60	52.96x87.20x4.15	270	-20-70	-30-80	SPI+18-bit RGB	Free	RTP	

TFT模塊
STANDARD TFT MODULES

MIT P/N	Size Inch	Resolution	A.A. (mm)	Outline Size (mm)	Brightness (nits)	Top. (°C)	Tstor. (°C)	Interface	Viewing Direction	Touch	Remarks
MI0350AXT-1	3.50	640xRGBx480	70.08x52.56	76.90x63.90x3.20	450	-20-70	-30-80	4-lane MIPI	Free	No	IPS mode
MI0350AXT-1CP	3.50	640xRGBx480	70.08x52.56	76.90x63.90x5.10	380	-20-70	-30-80	4-lane MIPI	Free	CTP	IPS mode
MI0350BAT-1	3.50	640xRGBx480	70.08x52.56	76.90x63.90x3.20	450	-20-70	-30-80	3-wire SPI+24-bit RGB	Free	No	IPS mode
MI0350BAT-1CP	3.50	640xRGBx480	70.08x52.56	76.90x63.90x5.10	380	-20-70	-30-80	3-wire SPI+24-bit RGB	Free	CTP	IPS mode
MI0390AT-1	3.90	480xRGBx128	95.04x25.34	105.50x40.64x2.95	600	-20-70	-30-80	24-bit RGB	12:00	No	Bar display
MI0390AT-1CP	3.90	480xRGBx128	95.04x25.34	105.50x40.64x5.28	510	-20-70	-30-80	24-bit RGB	12:00	CTP	Bar display
MI0400JT-1	4.00	480xRGBx800	51.84x86.40	57.14x96.85x2.00	425	-20-70	-30-80	3-wire SPI+16-bit RGB	Free	No	IPS mode
MI0400JT-1RP	4.00	480xRGBx800	51.84x86.40	57.14x96.85x3.20	340	-20-70	-30-80	3-wire SPI+16-bit RGB	Free	RTP	IPS mode
MI0400MT-2	4.00	480xRGBx480	71.86x70.18	74.83x78.98x1.93	530	-20-70	-30-80	3-wire SPI+24-bit RGB	Free	No	IPS mode
MI0400MT-2CP	4.00	480xRGBx480	71.86x70.18	83.70x83.70x3.53	450	-20-70	-30-80	3-wire SPI+24-bit RGB	Free	CTP	IPS mode
MI0400KT-1	4.00	720xRGBx720	71.93x71.93	74.83x78.98x1.46	350	-20-70	-30-80	4-lane MIPI	Free	No	IPS mode
MI0400KT-1CP2	4.00	720xRGBx720	71.93x71.93	84.00x84.00x3.06	300	-20-70	-30-80	4-lane MIPI	Free	CTP	IPS mode
MI0400KT-2	4.00	720xRGBx720	71.93x71.93	74.83x78.98x1.46	300	-20-70	-30-80	18-bit RGB	Free	No	IPS mode
MI0400KT-2CP	4.00	720xRGBx720	71.93x71.93	84.00x84.00x2.56	255	-20-70	-30-80	18-bit RGB	Free	CTP	IPS mode
MI0420ET-1	4.20	300x400	63.60x84.80	67.60x91.00x1.02	-	-20-70	-30-80	4-wire SPI	Free	No	R/B/W TFT, Reflective
MI0430AET-5	4.30	480xRGBx272	95.04x53.86	105.50x67.20x2.95	550	-20-70	-30-80	24-bit RGB	12:00	No	
MI0430AET-5RP	4.30	480xRGBx272	95.04x53.86	105.50x67.20x4.10	440	-20-70	-30-80	24-bit RGB	12:00	RTP	
MI0430AET-5CP3	4.30	480xRGBx272	95.04x53.86	105.50x67.20x4.98	460	-20-70	-30-80	24-bit RGB	12:00	CTP	
MI0430AHT-1	4.30	480xRGBx272	95.04x53.86	105.50x67.20x2.92	380	-20-70	-30-80	4-lane LVDS	12:00	No	
MI0430AHT-1RP	4.30	480xRGBx272	95.04x53.86	105.50x67.20x4.12	440	-20-70	-30-80	24-bit RGB	Free	RTP	IPS mode
MI0430AHT-1-B1	4.30	480xRGBx272	95.04x53.86	105.50x67.20x6.90	550	-20-70	-30-80	4-lane LVDS	Free	No	IPS mode
MI0430H1T-6	4.30	480xRGBx272	95.04x53.86	105.50x67.20x4.10	440	-20-70	-30-80	24-bit RGB	12:00	RTP	
MI0430H1T-7	4.30	480xRGBx272	95.04x53.86	105.50x67.20x2.90	550	-20-70	-30-80	24-bit RGB	12:00	No	
MI0430H1T-7CP6	4.30	480xRGBx272	95.04x53.86	105.50x67.20x4.90	460	-20-70	-30-80	24-bit RGB	12:00	CTP	
MI0430H5T-2	4.30	480xRGBx272	95.04x53.86	105.50x67.20x3.00	550	-20-70	-30-80	24-bit RGB	12:00	No	
MI0430H5T-2RP	4.30	480xRGBx272	95.04x53.86	105.50x67.20x4.10	440	-20-70	-30-80	24-bit RGB	12:00	RTP	
MI0430H5T-2CP3	4.30	480xRGBx272	95.04x53.86	105.50x67.20x5.03	460	-20-70	-30-80	24-bit RGB	12:00	CTP	
MI0430K2T-1	4.30	480xRGBx272	95.04x53.86	105.50x67.20x2.90	450	-20-70	-30-80	24-bit RGB	6:00	No	
MI0430K2T-1-O	4.30	480xRGBx272	95.04x53.86	105.50x67.20x2.90	360	-20-70	-30-80	24-bit RGB	Free	No	
MI0430K2T-1RP	4.30	480xRGBx272	95.04x53.86	105.50x67.20x4.10	350	-20-70	-30-80	24-bit RGB	6:00	RTP	
MI0430K2T-1CP4	4.30	480xRGBx272	95.04x53.86	105.50x67.20x4.90	380	-20-70	-30-80	24-bit RGB	6:00	CTP	
MI0430Z1T-2	4.30	480xRGBx800	56.16x93.60	62.40x105.40x2.15	350	-20-70	-30-80	SPI+24-bit RGB	Free	No	IPS mode
MI0430BFT-1RP	4.30	800xRGBx480	95.04x53.86	105.50x67.20x4.10	400	-20-70	-30-80	24-bit RGB	Free	RTP	IPS mode
MI0500LIT-9 V1.1	5.00	480xRGBx272	110.88x62.83	120.70x75.80x2.90	240	-20-70	-30-80	24-bit RGB	12:00	No	
MI0500LIT-9RP V1.2	5.00	480xRGBx272	110.88x62.83	120.70x75.80x4.05	200	-20-70	-30-80	24-bit RGB	12:00	RTP	
MI0500ADT-4	5.00	480xRGBx854	61.63x109.65	66.40x120.05x2.00	500	-20-70	-30-80	3-wire SPI+24 bits RGB	Free	No	IPS mode
MI0500ADT-6	5.00	480xRGBx854	61.63x109.65	66.40x120.05x2.00	500	-20-70	-30-80	2-lane MIPI	Free	No	IPS mode
MI0500HT-3	5.00	640xRGBx480	101.57x76.18	117.65x88.43x5.70	250	-20-70	-30-80	24-bit RGB	12:00	No	
MI0500ALT-1	5.00	720xRGBx1280	62.10x110.40	65.30x119.30x1.65	400	-20-70	-30-80	4-lane MIPI	Free	No	IPS mode
MI0500AHT-3RP	5.00	800xRGBx480	108.00x64.80	120.70x75.80x4.30	480	-20-70	-30-80	24-bit RGB	Free	RTP	IPS mode
MI0500P3T-7	5.00	800xRGBx480	108.00x64.80	120.70x75.80x3.00	600	-20-70	-30-80	24-bit RGB	12:00	No	SYNC mode
MI0500P3T-7RP	5.00	800xRGBx480	108.00x64.80	120.70x75.80x4.20	480	-20-70	-30-80	24-bit RGB	12:00	RTP	SYNC mode
MI0500P3T-7CP	5.00	800xRGBx480	108.00x64.80	120.70x75.80x5.00	510	-20-70	-30-80	24-bit RGB	12:00	CTP	SYNC mode
MI0500ANT-1	5.00	1080xRGBx1080	127.01x127.01	136.53x132.21x1.98	350	-20-60	-30-75	4-lane MIPI	Free	No	IPS mode
MI0550CT-1	5.50	720xRGBx1280	68.44x121.23	70.25x127.61x2.25	320	-20-70	-30-80	4-lane MIPI	Free		IPS mode
MI0560DT	5.60	320xRGBx234	113.28x84.71	126.50x100.00x5.70	200	-20-70	-30-80	Analog RGB	12:00	No	
MI0560DT-2	5.60	320xRGBx234	113.28x84.71	126.50x100.00x7.25	180	-10-60	-20-70	Analog RGB	12:00	RTP	
MI0560GT-1	5.60	640xRGBx480	112.90x84.67	126.50x100.00x5.70	350	-20-70	-30-80	18-bit RGB	12:00	No	
MI0560GT-1RP	5.60	640xRGBx480	112.90x84.67	126.50x100.00x7.10	280	-20-70	-30-80	18-bit RGB	12:00	RTP	
MI0570JT-2	5.70	320xRGBx240	115.20x86.40	127.00x98.43x10.50	390	-20-70	-30-80	18-bit RGB	12:00	RTP	
MI0570JT-4	5.70	320xRGBx240	115.20x86.40	127.00x98.43x9.20	490	-20-70	-30-80	18-bit RGB	12:00	No	

TFT模塊
STANDARD TFT MODULES


MIT P/N	Size Inch	Resolution	A.A. (mm)	Outline Size (mm)	Brightness (nits)	Top. (°C)	Tstor. (°C)	Interface	Viewing Direction	Touch	Remarks
MI0570I5T-3	5.70	320xRGBx240	115.20x86.40	144.00x104.60x13.00	500	-20-70	-30-80	18-bit RGB	6:00	No	
MI0570I5T-3RP	5.70	320xRGBx240	115.20x86.40	144.00x104.60x14.15	390	-20-70	-30-80	18-bit RGB	6:00	RTP	
MI0570I5T-3CP	5.70	320xRGBx240	115.20x86.40	144.00x104.60x15.00	420	-20-70	-30-80	18-bit RGB	6:00	CTP	
MI0570E2T-1	5.70	640xRGBx480	115.20x86.40	127.00x98.43x5.80	700	-20-70	-30-80	18-bit RGB	6:00	No	
MI0570E2T-1RP	5.70	640xRGBx480	115.20x86.40	127.00x98.43x9.20	530	-20-70	-30-80	18-bit RGB	6:00	RTP	
MI0570E2T-1CP	5.70	640xRGBx480	115.20x86.40	127.00x98.43x7.70	590	-20-70	-30-80	18-bit RGB	6:00	CTP	
MI0570E2T-10	5.70	640xRGBx480	115.20x86.40	147.60x98.43x10.50	700	-20-70	-30-80	24-bit RGB	6:00	No	
MI0620DT-1	6.20	800xRGBx480	137.52x77.23	155.20x88.20x5.00	300	-20-70	-30-80	24-bit RGB	6:00	No	
MI0620DT-1RP	6.20	800xRGBx480	137.52x77.23	155.20x88.20x6.50	250	-20-70	-30-80	24-bit RGB	6:00	RTP	
MI0620DT-3	6.20	800xRGBx480	137.52x77.23	155.20x88.20x6.50	700	-20-70	-30-80	24-bit RGB	6:00	No	
MI0700A2T-30	7.00	800xRGBx480	152.40x91.44	165.00x104.54x5.20	550	-20-70	-30-80	3-lane LVDS	12:00	No	DE mode
MI0700A2T-30RP	7.00	800xRGBx480	152.40x91.44	165.00x104.54x6.70	440	-20-70	-30-80	3-lane LVDS	12:00	RTP	DE mode
MI0700A2T-30RP1	7.00	800xRGBx480	152.40x91.44	165.00x104.54x6.80	440	-20-70	-30-80	3-lane LVDS	12:00	RTP	DE mode
MI0700A2T-30CP1	7.00	800xRGBx480	152.40x91.44	165.00x104.54x7.10	470	-20-70	-30-80	3-lane LVDS	12:00	CTP	DE mode
MI0700A2T-38	7.00	800xRGBx480	152.40x91.44	165.00x104.54x5.20	500	-20-70	-30-80	18-bit RGB	12:00	No	DE mode
MI0700A2T-38RP2	7.00	800xRGBx480	152.40x91.44	165.00x104.54x6.80	400	-20-70	-30-80	18-bit RGB	12:00	RTP	DE mode
MI0700A2T-38CP	7.00	800xRGBx480	152.40x91.44	165.00x104.54x7.10	425	-20-70	-30-80	18-bit RGB	12:00	CTP	DE mode
MI0700AJT-20CP1	7.00	800xRGBx480	152.40x91.44	165.00x104.54x7.10	365	-20-70	-30-80	18-bit RGB	12:00	CTP	
MI0700AJT-30	7.00	800xRGBx480	152.40x91.44	165.00x104.54x5.20	430	-20-70	-30-80	3-lane LVDS	12:00	No	
MI0700AJT-30RP	7.00	800xRGBx480	152.40x91.44	165.00x104.54x6.70	330	-20-70	-30-80	3-lane LVDS	12:00	RTP	
MI0700AJT-30RP1	7.00	800xRGBx480	152.40x91.44	165.00x104.54x6.80	330	-20-70	-30-80	3-lane LVDS	12:00	RTP	
MI0700AJT-30CP1	7.00	800xRGBx480	152.40x91.44	165.00x104.54x7.10	360	-20-70	-30-80	3-lane LVDS	12:00	CTP	
MI0700AJT-38	7.00	800xRGBx480	152.40x91.44	165.00x104.54x5.20	500	-20-70	-30-80	18-bit RGB	12:00	No	
MI0700AJT-38RP2	7.00	800xRGBx480	152.40x91.44	165.00x104.54x6.80	400	-20-70	-30-80	18-bit RGB	12:00	RTP	
MI0700AJT-38CP	7.00	800xRGBx480	152.40x91.44	165.00x104.54x7.10	425	-20-70	-30-80	18-bit RGB	12:00	CTP	
MI0700N2T-10	7.00	800xRGBx480	153.60x86.64	165.00x104.00x5.40	550	-20-70	-30-80	18-bit RGB	12:00	No	
MI0700N2T-10RP	7.00	800xRGBx480	153.60x86.64	165.00x104.00x6.50	440	-20-70	-30-80	18-bit RGB	12:00	RTP	
MI0700S6T-1	7.00	800xRGBx480	154.08x85.92	164.90x99.80x5.50	500	-20-70	-30-80	24-bit RGB	12:00	No	
MI0700S6T-1RP	7.00	800xRGBx480	154.08x85.92	164.90x99.80x7.00	400	-20-70	-30-80	24-bit RGB	12:00	RTP	
MI0700S6T-1CP1	7.00	800xRGBx480	154.08x85.92	164.90x99.80x7.40	420	-20-70	-30-80	24-bit RGB	12:00	CTP	
MI0700S6T-1CP4	7.00	800xRGBx480	154.08x85.92	164.90x99.80x7.90	420	-20-70	-30-80	24-bit RGB	12:00	CTP	
MI0700S6T-1-B	7.00	800xRGBx480	154.08x85.92	164.90x99.80x5.50	420	-20-70	-30-80	4-lane LVDS	12:00	No	Built-in backlight drive
MI0700S6T-1RP-B	7.00	800xRGBx480	154.08x85.92	164.90x99.80x7.00	330	-20-70	-30-80	4-lane LVDS	12:00	RTP	Built-in backlight drive
MI0700S6T-13	7.00	800xRGBx480	154.08x85.92	164.90x99.80x5.50	500	-20-70	-30-80	24-bit RGB	12:00	No	
MI0700S6T-13-O	7.00	800xRGBx480	154.08x85.92	164.90x99.80x5.50	400	-20-70	-30-80	24-bit RGB	Free	No	O-film
MI0700S6T-13RP	7.00	800xRGBx480	154.08x85.92	164.90x99.80x7.00	400	-20-70	-30-80	24-bit RGB	12:00	RTP	
MI0700S6T-13CP1	7.00	800xRGBx480	154.08x85.92	164.90x99.80x7.40	420	-20-70	-30-80	24-bit RGB	12:00	CTP	
MI0700DLT-1	7.00	800xRGBx1280	94.20x150.72	107.45x165.62x2.80	300	-20-70	-30-80	2-/3-lane MIPI-DSI	Free	No	IPS mode
MI0700BQT-1	7.00	1024xRGBx600	154.21x85.92	164.90x100.00x3.50	400	-20-70	-30-80	4-lane MIPI	12:00	No	
MI0700BQT-1RP	7.00	1024xRGBx600	154.21x85.92	164.90x100.00x5.00	310	-20-70	-30-80	4-lane MIPI	12:00	RTP	
MI0700BQT-1CP1	7.00	1024xRGBx600	154.21x85.92	164.90x100.00x5.50	340	-20-70	-30-80	4-lane MIPI	12:00	CTP	
MI0700BNT-1	7.00	1024xRGBx600	154.21x85.92	164.90x100.00x3.50	400	-20-70	-30-80	24-bit RGB	Free	No	FFS mode
MI0700BNT-1RP	7.00	1024xRGBx600	154.21x85.92	164.90x100.00x5.00	310	-20-70	-30-80	24-bit RGB	Free	RTP	FFS mode
MI0700BNT-1CP	7.00	1024xRGBx600	154.21x85.92	164.90x100.00x5.50	340	-20-70	-30-80	24-bit RGB	Free	CTP	FFS mode
MI0700BNT-4	7.00	1024xRGBx600	154.21x85.92	164.80x99.80x5.60	450	-20-70	-30-80	4-lane LVDS	Free	No	FFS mode
MI0700BNT-4RP	7.00	1024xRGBx600	154.21x85.92	164.80x99.80x7.00	360	-20-70	-30-80	4-lane LVDS	Free	RTP	FFS mode
MI0700BNT-4CP	7.00	1024xRGBx600	154.21x85.92	164.80x99.80x7.60	380	-20-70	-30-80	4-lane LVDS	Free	CTP	FFS mode
MI0700CBT-1	7.00	1024xRGBx600	154.21x85.92	164.80x99.80x5.50	500	-20-70	-30-80	4-lane MIPI	Free	No	IPS mode
MI0700CBT-1CP1	7.00	1024xRGBx600	154.21x85.92	164.80x99.80x7.50	400	-20-70	-30-80	4-lane MIPI	Free	CTP	IPS mode
MI0700XT-1	7.00	1024xRGBx600	153.60x90.00	165.75x105.39x2.45	250	-20-60	-30-70	4-lane LVDS	12:00	No	
MI0700XT-19	7.00	1024xRGBx600	153.60x90.00	165.75x105.39x3.20	500	-20-70	-30-80	4-lane LVDS	12:00	No	

TFT模塊
STANDARD TFT MODULES

MIT P/N	Size Inch	Resolution	A.A. (mm)	Outline Size (mm)	Brightness (nits)	Top. (°C)	Tstor. (°C)	Interface	Viewing Direction	Touch	Remarks
MI0700XT-19RP	7.00	1024xRGBx600	153.60x90.00	165.75x105.39x4.40	400	-20-70	-30-80	4-lane LVDS	12:00	RTP	
MI0700XT-19CP4	7.00	1024xRGBx600	153.60x90.00	165.75x105.39x5.60	420	-20-70	-30-80	4-lane LVDS	12:00	CTP	
MI0700XT-22	7.00	1024xRGBx600	153.60x90.00	165.75x105.39x5.00	700	-20-70	-30-80	4-lane LVDS	12:00	No	
MI0780AT-1	7.80	768x1024	118.89x158.52	123.80x168.30x1.09	-	-20-70	-30-80	4-lane MIPI	Free	No	Reflective
MI0800JT-3	8.00	800xRGBx480	176.64x99.36	192.80x116.90x6.40	450	-20-70	-30-80	24-bit RGB	12:00	No	
MI0800JT-3RP	8.00	800xRGBx480	176.64x99.36	192.80x116.90x8.00	350	-20-70	-30-80	24-bit RGB	12:00	RTP	
MI0800FT-8	8.00	800xRGBx600	162.00x121.50	183.00x141.00x5.60	250	-20-70	-30-80	24-bit RGB	12:00	No	
MI0800FT-9	8.00	800xRGBx600	162.00x121.50	183.00x141.00x7.10	225	-20-70	-30-80	24-bit RGB	12:00	RTP	
MI0800FT-10	8.00	800xRGBx600	162.00x121.50	183.00x141.00x5.60	250	-20-70	-30-80	3-lane LVDS	12:00	No	
MI0800FT-11	8.00	800xRGBx600	162.00x121.50	183.00x141.00x7.10	200	-20-70	-30-80	3-lane LVDS	12:00	RTP	
MI0800ACT-1	8.00	800xRGBx600	162.00x121.50	183.00x141.00x6.20	500	-20-70	-30-80	24-bit RGB	12:00	No	
MI0800AJT-2	8.00	800xRGBx1280	107.64x 172.22	114.60x184.10x2.60	450	-20-70	-30-70	4-lane MIPI	Free	No	
MI0800RT-3	8.00	1024xRGBx600	176.64x99.36	192.80x116.90x6.40	500	-20-70	-30-80	4-lane LVDS	12:00	No	
MI0800RT-3RP	8.00	1024xRGBx600	176.64x99.36	192.80x116.90x8.00	390	-20-60	-30-70	4-lane LVDS	12:00	RTP	
MI0800RT-3CP	8.00	1024xRGBx600	176.64x99.36	192.80x116.90x8.58	400	-20-70	-30-80	4-lane LVDS	12:00	CTP	
MI0800RT-4CP	8.00	1024xRGBx600	176.64x99.36	192.90x116.90x8.58	550	-20-70	-30-80	3-/4-lane LVDS	12:00	CTP	
MI0840LT-1	8.40	800xRGBx600	170.40x127.80	203.00x146.00x8.00	410	-20-70	-30-80	4-lane LVDS	6:00	No	
MI0880AT-1	8.80	480xRGBx1920	54.72x218.88	64.30x231.30x4.80	600	-20-70	-30-80	4-lane MIPI	Free	No	IPS mode, Bar display
MI0900AT-1	9.00	800xRGBx480	198.00x111.70	211.10x126.50x5.90	250	-20-70	-30-80	24-bit RGB	12:00	No	
MI0900AT-1RP	9.00	800xRGBx480	198.00x111.70	211.10x126.50x5.90	200	-20-70	-30-80	24-bit RGB	12:00	RTP	
MI0900E3T-1CPI	9.00	800xRGBx480	198.00x111.70	210.70x126.50x7.28	425	-20-70	-30-80	24-bit RGB	12:00	CTP	
MI0900E3T-1-O-B	9.00	800xRGBx480	198.00x111.70	210.70x126.50x6.60	500	-20-70	-30-80	3-lane LVDS	Free	No	O-film
MI0970A2T-3	9.70	1024xRGBx768	196.61x147.46	210.20x166.30x3.28	350	-20-70	-30-80	3-lane LVDS	12:00	No	
MI1010AVT-1	10.10	800xRGBx1280	135.36x216.58	142.82x228.48x2.60	350	-20-60	-30-80	4-lane MIPI	Free	No	IPS mode
MI1010AKT-1	10.10	1024xRGBx600	222.72x125.28	235.00x143.00x5.00	650	-20-70	-30-80	4-lane LVDS	Free	No	IPS mode
MI1010AKT-1CP	10.10	1024xRGBx600	222.72x125.28	238.00x151.50x7.05	550	-20-70	-30-80	4-lane LVDS	Free	CTP	IPS mode
MI1010AKT-3	10.10	1024xRGBx600	222.72x125.28	235.00x143.00x5.00	500	-20-70	-30-80	24-bit RGB	Free	No	IPS mode
MI1010AKT-3RP	10.10	1024xRGBx600	222.72x125.28	235.00x143.00x6.90	400	-20-70	-30-80	24-bit RGB	Free	RTP	IPS mode
MI1010ZIT-1	10.10	1024xRGBx600	222.72x125.28	235.00x143.00x5.00	550	-20-70	-30-80	3-lane LVDS	12:00	No	Built-in backlight drive
MI1010ZIT-1RP	10.10	1024xRGBx600	222.72x125.28	235.00x143.00x10.80	440	-20-70	-30-80	3-lane LVDS	12:00	RTP	Built-in backlight drive
MI1010ZIT-1CP3	10.10	1024xRGBx600	222.72x125.28	255.00x165.80 x7.57	460	-20-70	-30-80	3-lane LVDS	12:00	CTP	Built-in backlight drive
MI1010ZIT-4	10.10	1024xRGBx600	222.72x125.28	235.00x143.00x5.00	350	-20-70	-30-80	24-bit RGB	12:00	No	
MI1010ZIT-4RP	10.10	1024xRGBx600	222.72x125.28	235.00x143.00x6.90	240	-20-70	-30-80	24-bit RGB	12:00	RTP	
MI1010ZIT-4CP2	10.10	1024xRGBx600	222.72x125.28	255.00x165.80 x7.58	300	-20-70	-30-80	24-bit RGB	12:00	CTP	
MI1010AQT-1	10.10	1200xRGBx1920	135.36x216.58	143.00x228.60x2.35	350	-20-70	-30-80	4-lane MIPI	Free	No	IPS mode
MI1010AAT-3	10.10	1280xRGBx800	216.96x135.60	229.70x149.15x5.00	600	-20-70	-30-80	4-lane LVDS	No	Free	IPS mode
MI1010AAT-3RP	10.10	1280xRGBx800	216.96x135.60	229.70x149.15x6.90	470	-20-70	-30-80	4-lane LVDS	RTP	Free	IPS mode
MI1010AAT-3CP	10.10	1280xRGBx800	216.96x135.60	240.00x165.00x8.45	510	-20-70	-30-80	4-lane LVDS	CTP	Free	IPS mode
MI1010AAT-6	10.10	1280xRGBx800	216.96x135.60	229.70x149.15x5.00	600	-20-70	-30-80	4-lane LVDS	Free	No	IPS mode, Built-in backlight drive
MI1010AAT-6CP1	10.10	1280xRGBx800	216.96x135.60	240.00x165.00x8.45	510	-20-70	-30-80	4-lane LVDS	Free	CTP	IPS mode, Built-in backlight drive
MI1010AAT-6CP6	10.10	1280xRGBx800	216.96x135.60	246.30x164.90x7.40	510	-20-70	-30-80	4-lane LVDS	Free	CTP	IPS mode, Built-in backlight drive
MI1010ADT-1	10.10	1280xRGBx800	216.96x135.60	229.46x149.10x4.56	350	-20-70	-30-80	4-lane LVDS	Free	No	IPS mode, Built-in backlight drive
MI1010XT-2	10.10	1280xRGBx800	216.96x135.60	229.70x149.15x5.00	500	-20-70	-30-80	4-lane MIPI	Free	No	IPS mode
MI1010A12T-1	10.10	1280xRGBx800	216.96x135.60	229.46x149.30x2.55	330	-20-70	-30-80	4-lane LVDS	Free	No	IPS mode
MI1010ART-1	10.10	1920xRGBx1200	216.81x135.50	229.46x149.10x2.55	300	-20-70	-30-80	2 channels, 4-lane LVDS	No	Free	IPS mode
MI1010ART-1RP	10.10	1920xRGBx1200	216.81x135.50	229.46x149.10x4.45	240	-20-70	-30-80	2 channels, 4-lane LVDS	RTP	Free	IPS mode
MI1010ART-1CP	10.10	1920xRGBx1200	216.81x135.50	240.00x165.00x6.00	250	-20-70	-30-80	2 channels, 4-lane LVDS	CTP	Free	IPS mode
MI1020BT-3RP	10.20	800xRGBx480	222.00x132.48	235.00x145.80x8.10	270	-20-70	-30-80	18-bit RGB	RTP	12:00	
MI1040GT-1	10.40	800xRGBx600	211.20x158.40	236.00x176.90x5.60	400	-20-70	-30-80	3-lane LVDS	12:00	No	
MI1040GT-3	10.40	800xRGBx600	211.20x158.40	236.00x176.90x7.30	300	-20-70	-30-80	3-lane LVDS	12:00	RTP	
MI1040GT-10	10.40	800xRGBx600	211.20x158.40	243.00x179.40x10.50	440	-20-70	-30-80	4-lane LVDS	12:00	RTP	

TFT模塊
STANDARD TFT MODULES

MIT P/N	Size Inch	Resolution	A.A. (mm)	Outline Size (mm)	Brightness (nits)	Top. (°C)	Tstor. (°C)	Interface	Viewing Direction	Touch	Remarks
MI1040LIT-1	10.40	800xRGBx600	211.20x158.40	228.50x175.40x5.90	650	-20-70	-30-80	24-bit RGB	12:00	No	
MI1040LIT-1RP1	10.40	800xRGBx600	211.20x158.40	228.50x175.40x7.60	500	-20-70	-30-80	24-bit RGB	12:00	RTP	
MI1040UT-2CP	10.40	800xRGBx600	211.20x158.40	236.00x176.90x7.85	240	-20-70	-30-80	3-/4-lane LVDS	12:00	CTP	
MI1040XT-1	10.40	800xRGBx600	211.20x158.40	236.00x176.90x5.70	230	-20-70	-20-70	4-lane LVDS	12:00	No	
MI1040YT-4	10.40	1024xRGBx768	211.20x158.40	236.00x174.30x6.00	500	-20-70	-20-70	4-lane LVDS	Free	No	MVA mode
MI1160AT-1	11.60	1920xRGBx1080	256.32x144.18	263.40x157.22x4.95	330	-10-60	-20-70	eDP	Free	No	IPS mode
MI1160AT-1CP	11.60	1920xRGBx1080	256.32x144.18	265.00x158.82x5.05	285	-10-60	-20-70	eDP	Free	CTP	IPS mode
MI1210WT-1	12.10	800xRGBx600	246.00x184.50	279.00x209.00x9.00	400	-20-70	-30-80	4-lane LVDS	12:00	No	
MI1210KT-1	12.10	1024xRGBx768	245.76x184.32	279.00x209.00x9.00	350	-20-70	-30-80	3-/4-lane LVDS	Free	No	
MI1210KT-1CP1	12.10	1024xRGBx768	245.76x184.32	279.00x209.00x13.00	300	-20-70	-30-80	3-/4-lane LVDS	Free	CTP	
MI1210UT-1	12.10	1280xRGBx800	261.12x163.20	278.20x184.00x8.71	450	-20-70	-30-80	4-lane LVDS	Free	No	IPS mode
MI1260AT-1	12.60	1920xRGBx515	309.31x82.97	315.61x94.02x3.00	400	0-60	-20-65	2-lane eDP	Free	No	IPS mode
MI1500HT-3	15.00	1024xRGBx768	304.13x228.10	326.50x253.50x11.80	400	-20-70	-30-80	4-lane LVDS	Free	No	WVA mode
MI1500HT-6	15.00	1024xRGBx768	304.13x228.10	326.50x253.50x11.80	300	-20-70	-30-80	3-/4-lane LVDS	12:00	No	
MI1500JT-1	15.00	1024xRGBx768	304.13x228.10	326.50x253.50x12.00	420	-20-70	-30-80	4-lane LVDS	6:00	No	
MI1500KT-3	15.00	1024xRGBx768	304.13x228.10	326.50x253.50x11.30	300	-20-70	-30-80	3-/4-lane LVDS	Free	No	O-film
MI1500MT-1	15.00	1024xRGBx768	304.10x228.10	326.50x253.50x9.10	300	-20-70	-30-70	3-/4-lane LVDS	Free	No	IPS mode
MI1560IT-1	15.00	1920xRGBx1080	344.16x193.59	359.44x206.44x3.30	400	-10-50	-20-60	eDP	Free	No	IPS mode
MI1560JT-1	15.60	1920xRGBx1080	344.16x193.59	363.80x216.00x9.60	500	0-70	-20-80	2 channels, 4-lane LVDS	Free	No	IPS mode
MI1560QT-1	15.60	1920xRGBx1080	344.16x193.59	350.70x215.37x2.73	260	-20-70	-30-70	eDP	Free	No	IPS mode

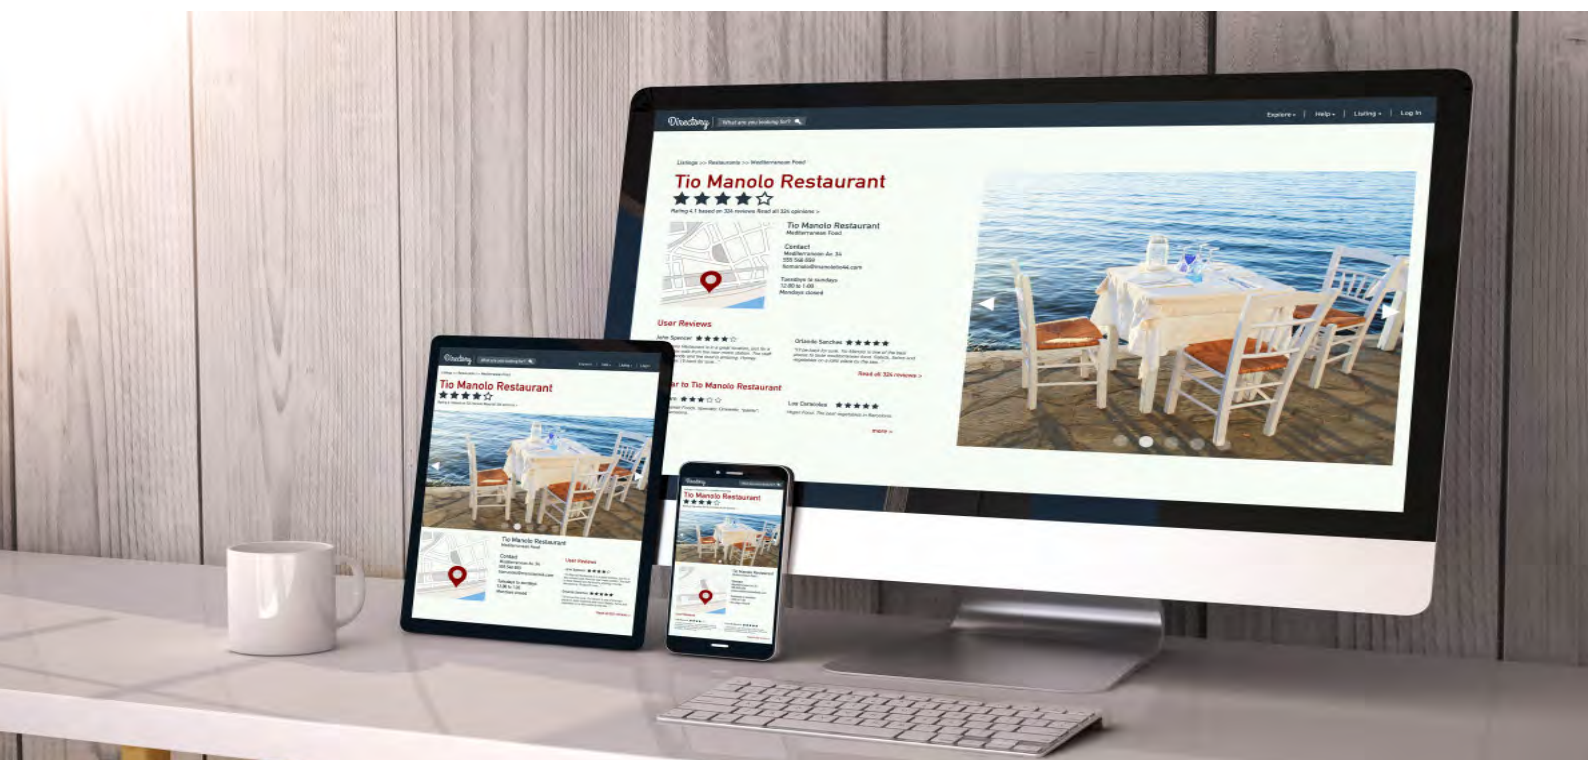

超寬溫TFT模塊
SUPER WIDE TEMPERATURE TFT MODULES

MIT P/N	Size Inch	Resolution	A.A. (mm)	Outline Size (mm)	Brightness (nits)	Top. (°C)	Tstor. (°C)	Interface	Viewing Direction	Touch	Remarks
MI0200ACT-2	2.00	320xRGBx240	40.80x30.60	46.10x40.96x2.53	450	-30-85	-30-85	CPU (interface I); CPU (interface II)	Free	No	
MI0283AFT-1	2.83	240xRGBx320	43.20x57.60	50.20x69.30x2.90	300	-30-70	-40-85	CPU, RGB, SPI	6:00	No	
MI0350AUT-4	3.50	320xRGBx240	70.08x52.56	76.90x63.90x3.20	1000	-30-85	-30-85	3-wire SPI+24-bit RGB	Free	No	IPS mode
MI0350AUT-4CP	3.50	320xRGBx240	70.08x52.56	76.90x63.90x5.10	850	-30-85	-30-85	3-wire SPI+24-bit RGB	Free	CTP	IPS mode
MI0350AST-1	3.50	240xRGBx320	53.28x71.04	64.00x85.00x3.00	300	-20-85	-30-85	3-wire SPI+18-bit RGB	Free	No	IPS mode
MI0350AUT-3	3.50	320xRGBx240	70.08x52.56	76.90x63.90x3.20	550	-30-85	-30-85	3-wire SPI+24-bit RGB	Free	No	IPS mode
MI0400PT-1	4.00	480xRGBx480	71.86x70.18	77.00x80.00x2.30	1000	30-85	-40-90	2-lane MIPI	Free	No	IPS mode
MI0400PT-1CP	4.00	480xRGBx480	71.86x70.18	77.00x80.00x4.35	950	30-85	-40-90	2-lane MIPI	Free	CTP	IPS mode
MI0430AHT-1	4.30	480xRGBx272	95.04x53.86	105.50x67.20x2.92	550	-30-85	-30-85	24-bit RGB	Free	No	IPS mode
MI0430AHT-1CP	4.30	480xRGBx272	95.04x53.86	105.50x67.20x4.95	470	-30-85	-30-85	24-bit RGB	Free	CTP	IPS mode
MI0430AHT-2	4.30	480xRGBx272	95.04x53.86	105.50x67.20x2.92	1000	-30-85	-30-85	24-bit RGB	Free	No	IPS mode
MI0430AHT-2CP	4.30	480xRGBx272	95.04x53.86	105.50x67.20x4.95	850	-30-85	-30-85	24-bit RGB	Free	CTP	IPS mode
MI0430BFT-1	4.30	800xRGBx480	95.04x53.86	105.50x67.20x2.90	500	-30-85	-40-85	24-bit RGB	Free	No	IPS mode
MI0430BFT-1CP	4.30	800xRGBx480	95.04x53.86	105.50x67.20x5.03	42	-30-85	-40-85	24-bit RGB	Free	CTP	IPS mode
MI0430BFT-2	4.30	800xRGBx480	95.04x53.86	105.50x67.20x2.90	1000	-30-85	-40-85	24-bit RGB	Free	No	IPS mode
MI0430BFT-2CP	4.30	800xRGBx480	95.04x53.86	105.50x67.20x5.03	850	-30-85	-40-85	24-bit RGB	Free	CTP	IPS mode
MI0430CFT-1	4.30	800xRGBx480	95.04x53.86	105.50x67.20x2.90	500	-30-85	-30-85	24-bit RGB	Free	No	ADS mode
MI0500AHT-3	5.00	800xRGBx480	108.00x64.80	120.70x75.80x3.10	600	-30-85	-30-85	24-bit RGB	Free	No	IPS mode
MI0500AHT-3CP	5.00	800xRGBx480	108.00x64.80	165.00x105.00x6.45	510	-30-85	-30-85	24-bit RGB	Free	CTP	IPS mode
MI0500AHT-3CPI	5.00	800xRGBx480	108.00x64.80	120.70x75.80x5.10	510	-30-85	-30-85	24-bit RGB	Free	CTP	IPS mode
MI0500AHT-3-B2	5.00	800xRGBx480	108.00x64.80	120.70x75.80x3.10	600	-30-85	-30-85	8-/16-bit CPU	Free	No	IPS mode
MI0500AHT-4	5.00	800xRGBx480	108.00x64.80	120.70x75.80x3.10	850	-30-85	-30-85	24-bit RGB	Free	No	IPS mode
MI0500AHT-4CPI	5.00	800xRGBx480	108.00x64.80	120.70x75.80x5.10	720	-30-85	-30-85	24-bit RGB	Free	CTP	IPS mode
MI0500AKT-1	5.00	800xRGBx480	108.00x64.80	120.70x75.80x3.10	600	-30-85	-30-85	4-lane LVDS	Free	No	IPS mode
MI0500AKT-1CP	5.00	800xRGBx480	108.00x64.80	165.00x105.00x6.35	510	-30-85	-30-85	3-/4-lane LVDS	Free	CTP	IPS mode
MI0500AKT-1CPI	5.00	800xRGBx480	108.00x64.80	120.70x75.80x5.10	510	-30-85	-30-85	3-/4-lane LVDS	Free	CTP	IPS mode
MI0570ADT-1	5.70	320xRGBx240	115.20x86.40	144.00x104.60x13.00	1200	-30-85	-30-85	18-bit RGB	12:00	No	
MI0570JT-5	5.70	320xRGBx240	115.20x86.40	127.00x98.43x9.20	570	-30-75	-40-80	18-bit RGB	12:00	No	
MI0570AET-2	5.70	640xRGBx480	115.20x86.40	127.00x98.43x5.80	700	-30-80	-30-80	18-bit RGB	Free	No	
MI0650JT	6.50	800xRGBx480	143.40x76.70	155.20x89.40x5.50	500	-30-85	-30-85	24-bit RGB	12:00	No	
MI0700BUT-1	7.00	800xRGBx480	152.40x91.44	166.60x105.80x7.50	1000	-30-85	-40-95	3-wire SPI+24-bit RGB	Free	No	IPS mode
MI0700BWT-1	7.00	800xRGBx480	152.40x91.44	170.00x110.00x6.00	500	-30-85	-40-90	4-lane LVDS	Free	No	IPS mode
MI0700BZT-1	7.00	800xRGBx480	152.40x91.44	165.00x104.00x8.40	1000	-30-85	-40-95	24-bit RGB	Free	No	IPS mode
MI0700CDT-1	7.00	800xRGBx480	152.40x91.44	165.00x104.54x5.25	1000	-30-80	-30-80	4-lane LVDS	Free	No	IPS mode
MI0700ST-1	7.00	800xRGBx480	154.08x85.92	164.90x100.00x5.70	400	-30-85	-30-85	24-bit RGB	12:00	No	
MI0700S6T-8	7.00	800xRGBx480	154.08x85.92	164.90x99.80x5.50	400	-20-85	-30-85	24-bit RGB	12:00	No	
MI0700CET-1	7.00	1024xRGBx600	153.60x90.00	165.75x105.39x5.00	1200	-30-80	-30-80	4-lane LVDS	12:00	No	
MI0700XT-26	7.00	1024xRGBx600	153.60x90.00	165.75x105.39x3.20	500	-25-80	-30-80	3-/4-lane LVDS	12:00	No	
MI0700BST-1	7.00	1280xRGBx768	152.45x91.47	166.90x108.65x7.40	1000	-30-85	-40-90	4-lane LVDS	Free	No	ADS mode
MI0700CFT-2	7.00	1280xRGBx768	152.45x91.47	165.91x107.04x6.52	1000	-40-85	-40-90	4-lane LVDS	Free	No	
MI0800AKT-1	8.00	800xRGBx480	177.20x104.40	187.40x118.00x6.30	920	-30-85	-40-95	4-lane LVDS	Free	No	IPS mode, DE mode
MI0800JT-2	8.00	800xRGBx480	176.64x99.36	192.80x116.90x6.40	450	-30-85	-30-85	24-bit RGB	12:00	No	
MI0800BAIT-1	8.00	1280xRGBx720	177.02x99.57	192.80x116.90x6.40	1000	-30-85	-40-90	4-lane LVDS	Free	No	IPS mode, DE mode
MI0900HT-1	9.00	1280xRGBx720	198.72x111.78	212.20x127.50x7.90	1000	-30-85	-40-90	4-lane LVDS	Free	No	IPS mode
MI1010BT-1	10.10	1280xRGBx720	223.68x125.82	242.32x151.40x18.18	1000	-40-85	-40-90	4-lane LVDS	Free	No	IPS mode
MI1010AOT-2	10.10	1920xRGBx1080	222.49x124.71	236.75x142.85x5.55	1000	-30-85	-40-90	2 channels, 4-lane LVDS	Free	No	IPS mode
MI1020BT	10.20	800xRGBx480	222.00x132.48	235.00x145.80x6.10	350	-30-85	-30-85	18-bit RGB	12:00	No	
MI1025AT-1	10.25	1280xRGBx480	243.84x91.44	265.20x109.85x8.65	600	-30-85	-30-85	3-/4-lane LVDS	Free	No	IPS mode
MI1025BT-1	10.25	1920xRGBx720	243.65x91.37	258.90x111.10x7.55	1000	-40-85	-40-90	2 channels, 4-lane LVDS	Free	No	IPS mode

超寬溫TFT模塊
SUPER WIDE TEMPERATURE TFT MODULES

MIT P/N	Size Inch	Resolution	A.A. (mm)	Outline Size (mm)	Brightness (nits)	Top. (°C)	Tstor. (°C)	Interface	Viewing Direction	Touch	Remarks
MI1040GT-5	10.40	800xRGBx600	211.20x158.40	243.00x179.40x8.50	350	-30-80	-30-85	4-lane LVDS	12:00	No	
MI1040GT-8A	10.40	800xRGBx600	211.20x158.40	243.00x179.40x8.80	550	-30-80	-30-85	4-lane LVDS	12:00	No	
MI1040VT-1	10.40	800xRGBx600	211.20x158.40	243.00x179.40x8.50	400	-30-85	-30-85	3-/4-lane LVDS	12:00	No	
MI1210ABT-1	12.10	800xRGBx600	246.00x184.50	261.65x203.00x9.00	1500	-30-85	-30-85	1 channel LVDS	12:00		Built-in backlight drive
MI1210LT-1	12.10	800xRGBx600	246.00x184.50	260.50x204.00x8.40	450	-30-85	-30-85	3-/4-lane LVDS	Free	No	MVA mode
MI1210AAT-1	12.10	1024xRGBx768	245.76x184.32	260.50x203.00x9.90	1300	-30-80	-40-90	3-/4-lane LVDS	Free	No	IPS mode
MI1210YT-1	12.10	1024xRGBx768	245.76x184.32	260.50x204.00x8.40	600	-30-85	-40-90	3-/4-lane LVDS	Free	No	IPS mode
MI1210RT-1	12.10	1280xRGBx800	261.12x163.20	278.20x184.00x9.29	400	-30-85	-30-85	3-/4-lane LVDS	Free	No	IPS mode
MI1210VT-1	12.10	1280xRGBx800	261.12x163.20	277.40x182.70x11.60	1200	-30-80	-30-85	4-lane LVDS	Free	No	IPS mode
MI1230ET-1	12.30	1920xRGBx720	292.03x109.51	313.91x131.41x7.34	1000	-30-85	-40-90	4-lane LVDS	Free	No	IPS mode
MI1230FT-1	12.30	1920xRGBx720	292.03x109.51	302.00x125.40x6.20	850	-30-85	-40-90	2 channels, 4-lane LVDS	Free	No	IPS mode
MI1500JT-3	15.00	1024xRGBx768	304.13x228.10	326.50x253.50x12.00	500	-30-85	-30-85	4-lane LVDS	6:00	No	
MI1500MIT-1	15.00	1024xRGBx768	304.10x228.10	326.50x253.50x9.10	500	-30-80	-40-80	3-/4-lane LVDS	Free	No	NPVA mode
MI1560LT-1	15.00	1920xRGBx1080	344.16x193.59	363.80x215.90x10.32	1000	-30-85	-30-85	2 channels, 4-lane LVDS	Free	No	IPS mode

