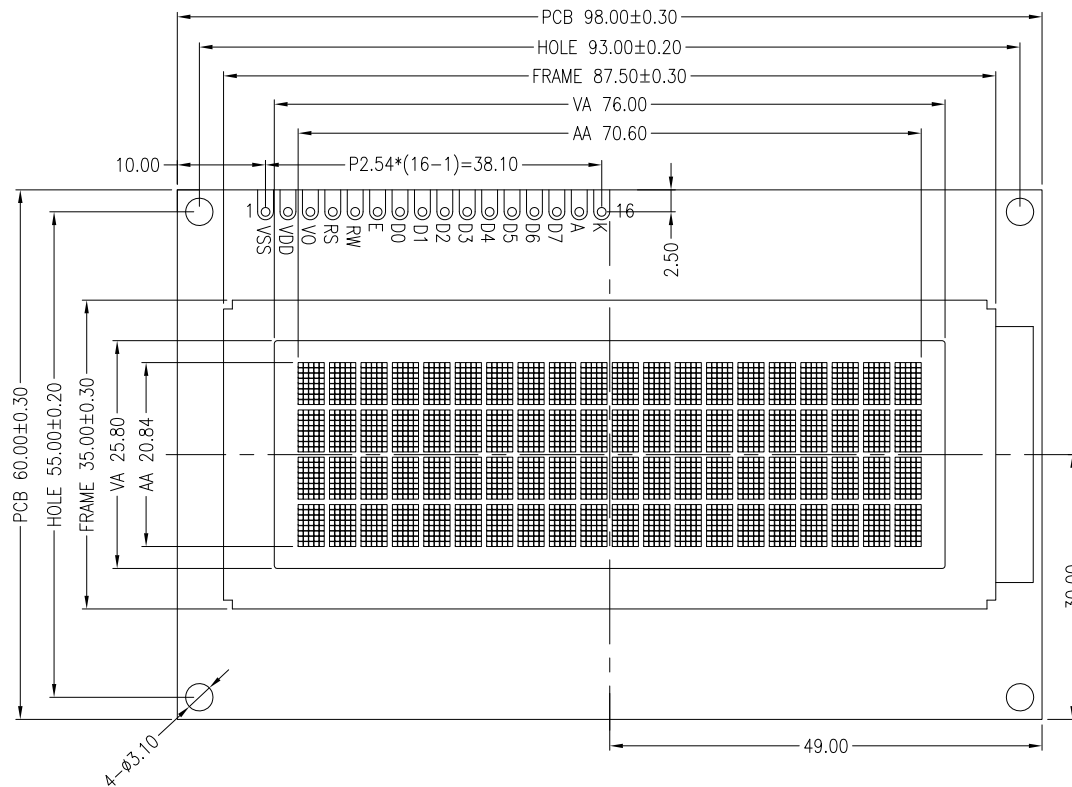


SCALE 4:1

PIN DESCRIPTION	
PIN	SYMBOL
1	VSS
2	VDD
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LEDA
16	LEDK

NOTES:

1. DISPLAY TYPE: STN (BLUE), NEGATIVE, TRANSMISSIVE
2. VIEWING DIRECTION: 6 O'CLOCK
3. OPERATING VOLTAGE: VDD=5.0V, VOP=4.7V
4. DRIVER IC: AIP31066W2 OR EQUIVALENT
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: WHITE LED
8. GENERAL TOLERANCE: ±0.20MM
9. ROHS COMPLIANT

01	FIRST ISSUE	CAROL	2023.07.21	APPROVED BY:		UNIT: mm	DESCRIPTION:
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	01	SHEET NO.: 1/1	CHARACTER MODULE



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2023.07.21	MODULE P/N:
CHECKED BY:			MI2004J3-1
APPROVED BY:			
VERSION NO:	01		