



DETAIL A
 SCALE 100:1

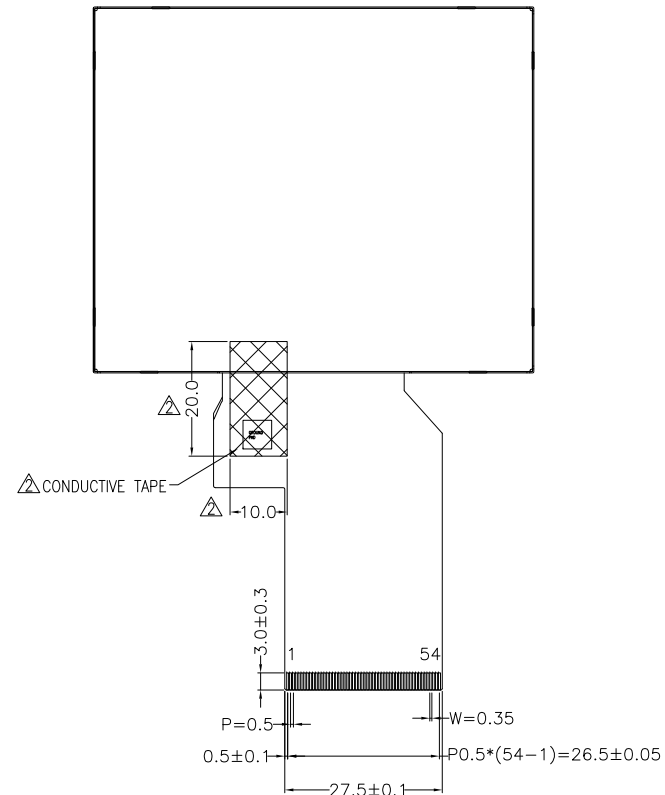

BACKLIGHT CIRCUIT DIAGRAM

TFT PIN DESCRIPTION			
PIN	SYMBOL	PIN	SYMBOL
1	LEDK	28	R0
2	LEDK	29	R1
3	LEDA	30	R2
4	LEDA	31	R3
5	NC	32	R4
6	NC	33	R5
7	NC	34	R6
8	RESET	35	R7
9	SPENA	36	HSYNC
10	SPCLK	37	VSYNC
11	SPDAT	38	DCLK
12	B0	39	NC
13	B1	40	NC
14	B2	41	VDD
15	B3	42	VDD
16	B4	43	NC
17	B5	44	NC
18	B6	45	NC
19	B7	46	NC
20	G0	47	NC
21	G1	48	NC
22	G2	49	NC
23	G3	50	NC
24	G4	51	NC
25	G5	52	DEN
26	G6	53	GND
27	G7	54	GND

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VDD=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: NV3052C
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: 6-CHIP WHITE LED, If=20mA, Vf=16.8V~20.4V
8. SURFACE LUMINANCE: 450CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. GENERAL TOLERANCE: ±0.2MM
11. ROHS COMPLIANT

MULTI-INNO TECHNOLOGY CO., LTD.			
DRAWN BY:	CAROL 2020.07.09		MODULE P/N:
CHECKED BY:		SCALE : 1/1	MI0350BAT-1
APPROVED BY:		UNIT: mm	DESCRIPTION:
VERSION NO:	02	SHEET NO.: 1/1	TFT MODULE

02	ADD CONDUCTIVE TAPE ON THE BACK OF FPC	CAROL	2021.08.18
01	FIRST ISSUE	CAROL	2020.07.09
VER.	REVISED DESCRIPTION	REVISER	DATE